


NE11

INDUSTRIAL JOYSTICK

- Single-axis operation
- Spring return&Friction
- Optional for MICROSWITCH, POTENTIOMETER,ENCODER

The **NE11** features a robust metal-cast drive block as standard, ensuring long service life and a high number of switching cycles. It is suitable for demanding control tasks, including deck machinery.

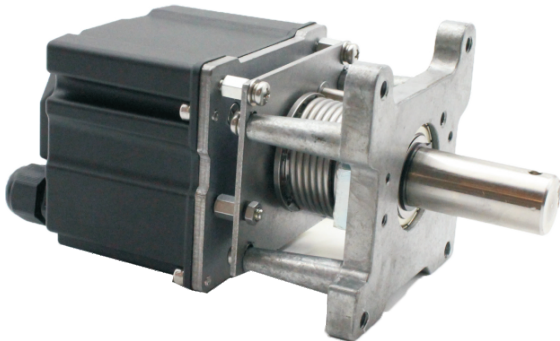

Technical Data

Ambient Temperature: -20°C to 60°C
Mechanical Life: 2M
Protection Level: IP65 Above/ IP00 Below

Selection	Movement	Gate	Interface	Contact arrangement	Wiring																																																																	
• Z: Spring return • R: Friction brake																																																																						
• 1: 1-Axis↑																																																																						
• Voltage output DC24V V1: -10V~0~+10V V2: +10V~0~+10V V3: -5V~0~+5V V4: +5V~0~+5V V5: 0~+10V V6: 0~+5V	• Hall output DC5V HV1: 0-2.5-5V HV2: 0.5-2.5-4.5V HV3: 1.0-2.5-4.0V Hv4: 1.25-2.5-3.75V	• Potentiometer output DC36V P1: Two directions output P2: One directions output • 5K • 10K	• Current output DC24V I1: 4mA-12mA-20mA I2: 20mA-4mA-20mA																																																																			
3 2 1 0 1 2 3 1/01 2/02 3/03 4/04 5/05 <table><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> 03 2 1 0 1 2 1/01 2/02 3/03 4/04 <table><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> 02 1 0 1 1/01 2/02 3/03 <table><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table> 01 Special X																																																																						
• A: Terminal interface • L: Direct outgoing line 30mm • X: Customize																																																																						

Dimensions

